



TSR SPECIAL TRAILERS


3 AXLE SEMI LOWLOADER. 1 AXLE SELF TRACKING.

Dimensions:

• Total length	13,350 mm	• Coupling height	1,180 mm
• Front overhang	1,400 mm	• Height of lowbed	900 mm
• Wheelbase	8,200 mm	• Axle distance	1,360 mm
• Rear overhang	3,750 mm	• Head stir radius (chamfered)	1,638 mm
• Length lower bed	9,250 mm	• Stir radius (truck)	2,300 mm
• Kingpin to step	2,700 mm	• Total width	2,550 mm

Weights (technical):

• Coupling	18,000 kg	• Tare weight (excl. options)	8,600 kg
• Axles	30,000 kg	• Loading capacity	39,400 kg
• Total weight	48,000 kg		

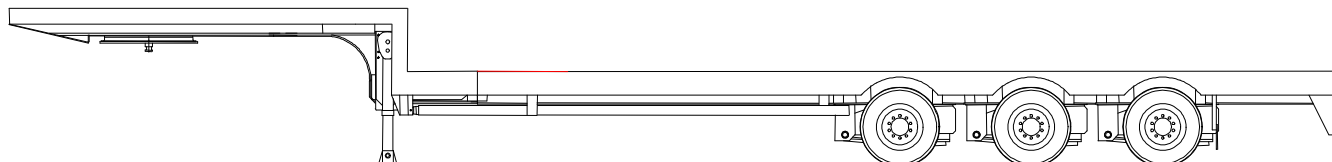

Chassis / construction

- Single beam chassis in steel 52/3 with cross members and siderave.
- Not extendable
- Chamfered front (head).
- Chamfered rear of the lowbed inclusive connection for use of ramps
- Chamfered neck inclusive connection for use of ramps
- Edging strip fronthead in UNP 160 and in lowbed 240.
- Cross members are welded at both sides of the box-sections.
- 9 straight timberstake pockets in side rave 96 x 66 x 6
- Lashings (mushrooms) in side rave 6 pcs per side
- Lashing rings 5 tons, 6 pcs per side in lowbed and 2 pcs per side on the neck
- 2 mechanical landing legs with 2 speeds (24 tons)
- 2 landing legs at the rear
- Holder for hazardlight at the rear including plug socket
- Front to rear marker brackets

Paintwork:

- All steel parts are sandblasted and blown dust free
- Primer with a thickness of 60 mu.
- 2 components coating with a thickness of 60mu
- Colour: in 1 color in the choice of the customer in RAL.....

Running gear:

- 3 x 10 ton GIGANT-axles with air suspension.
- Last axle as self steering axle
- Axle capacity technical 12 tons
- Raise and lower valve in the air suspension system
- 12 tyres and wheels, 235/75 R17.5 .
- 1 Kingpin SAE 2" removable with flange and bolts.
- Pneumatically controlled brake system, 2-canal system with load depending brake and parking brake conform to the EG-norm automatic slack-adjusters on the axles and EBS/ABS
- 1 24 volts lighting installation with 7-pins DIN and SAE connection conforming to the EG-norm with LED sidemarks
- Floor in hardwood (38mm). Above the axles is checkerplate mounted in steel 8/10mm

Finishing:

- Wheel cases incl. holder is mounted
- Side protection left and right

*Alterations are under restriction